



FSB - METAL FILLER BREATHER WITH STRAINER

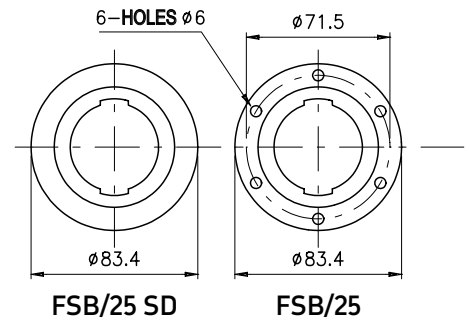

FSB/05

FSB/25

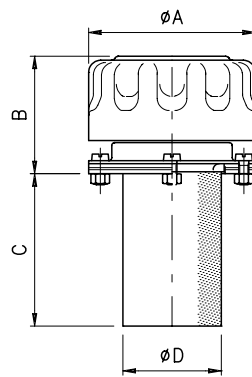



FSB/25 SD

FSB/25

plugs, breathers and dipsticks



FSB/25 BM

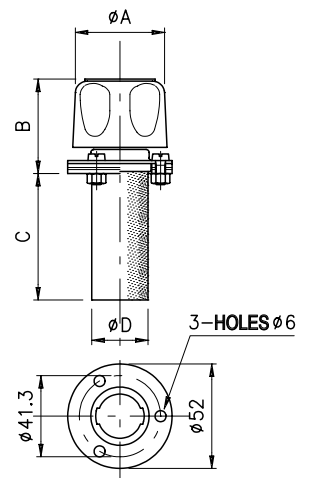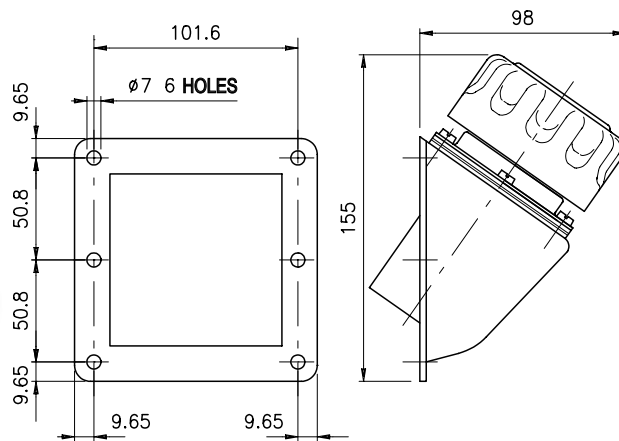

- Chrome plated steel ventilated cap, Polyurethane filter element 40 microns, airflow capacity 720 Litres/minute-max.
- Base, flange mounted with 6 bolts
Cap, bayonet fitting
- Version FSB/SD for welding to tank surface

- Rugged cast aluminium housing (model FSB/BM)
- Standard metal strainer
- Supplied with gasket and M5 fixing bolts

Cod.	Aria / Airflow	A	B	C	D	Peso / weight gr.
FSB/05	150 Lt/min	46,5	44	65	27,5	96
FSB/25	720 Lt/min	80	58,5	78,5	49	300
FSB/25SD	720 Lt/min	80	55	105	38	290